




# ELECTRIC PUMPS

## 6" & 8" ELECTRIC PUMPS



TRANSFER ONLY

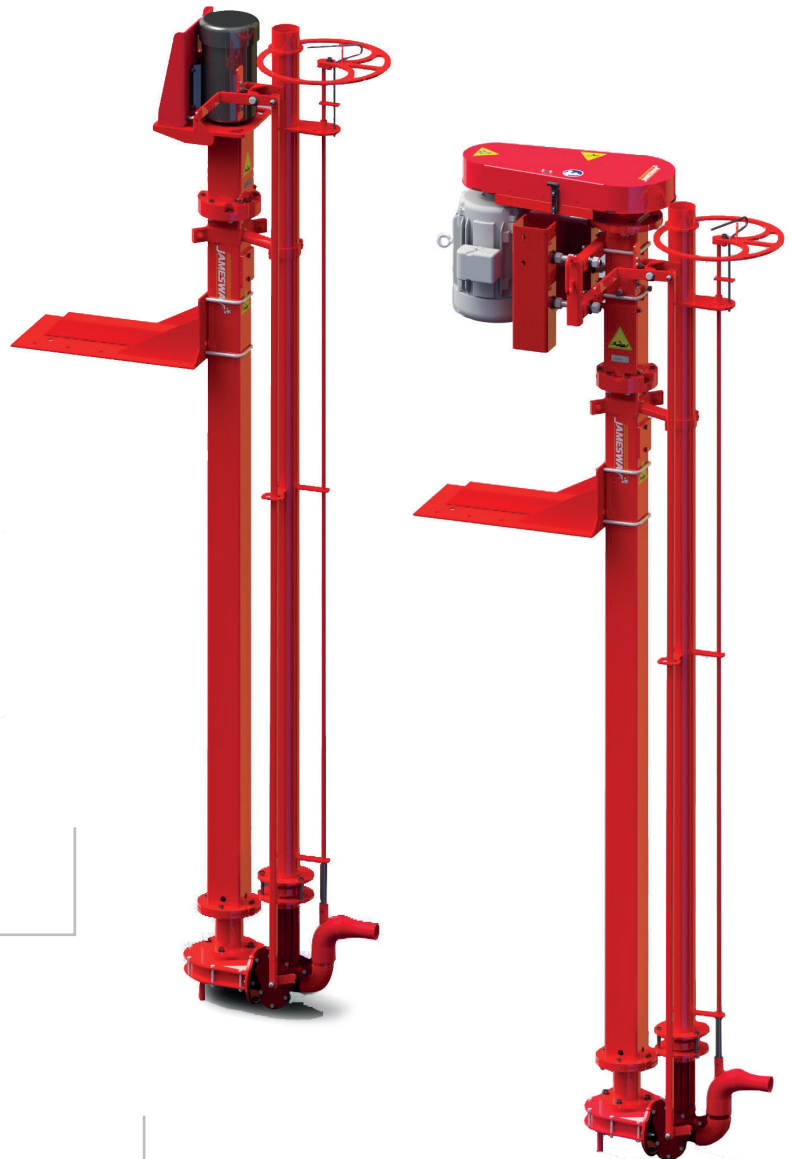

AGITATE & TRANSFER

# 6" & 8" ELECTRIC PUMPS


## DIRECT DRIVE SIMPLICITY

The heavy duty mounting plate supports a standard motor base, no C-face mounting required.

Also available without agitation, saving money on transfer-only jobs.

### THE COMPACT DIRECT DRIVE ON THE 6" DIAMETER IMPELLER DELIVERS TOP PERFORMANCE WITH LOW MAINTENANCE.

The heavy duty construction of this simple pump makes it the perfect choice to transfer milkhouse waste, separated liquids or other wastewaters.

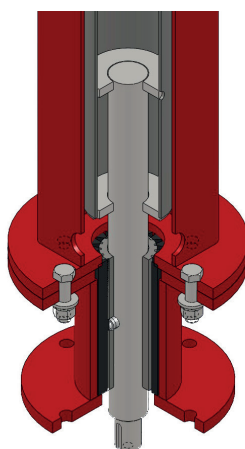

No grease, no oil and no bearings in the lower shaft of Jamesway 6" & 8" impeller pumps. The submerged Flexi-Tech bushing runs on a hardened replaceable wear sleeve for long life. The Flexi-Tech bushing withstands milkhouse chemicals, manure or sand, resulting in long and trouble-free operation. ◀


The volute housing is equipped with bolted shear plate and curved impeller blades for maximum efficiency. The all-bolted construction and replaceable parts let you keep your pump running like new. ▶



### SPECIFICATIONS

Pit depths	4 ft – 12 ft
Agitation	Optional, 2" nozzle with 240° rotation and manual flapper.
Main beam	5"x5" square tube.
Discharge	4" Gheen male coupler.
Driveline	3-1/2" diameter.
End shaft	1-5/8" diameter.
Wear sleeve	2-3/16" diameter, hardened.
Lower Bearing	Flexi-Tech sleeve 3-1/4" OD


### DIRECT DRIVE 6" IMPELLER PERFORMANCE

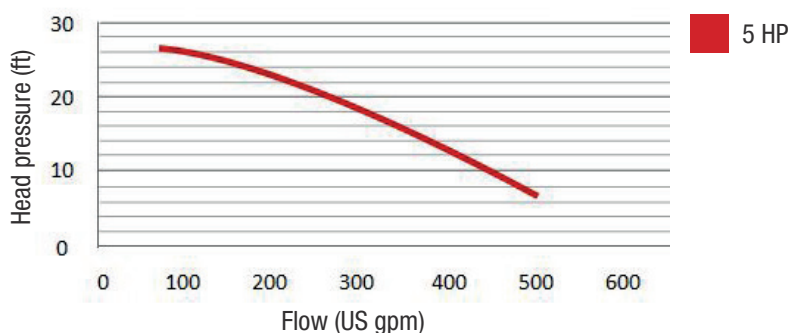

## BELT DRIVE VERSATILITY

### THE BELT DRIVE 8" PUMP OFFERS THREE MOTOR CHOICES TO PROVIDE THE IDEAL PRESSURE AND FLOW FOR EVERY JOB.


The right choice for unbedded manure and for longer distance transfer, this high efficiency pump delivers more gallons on less energy.

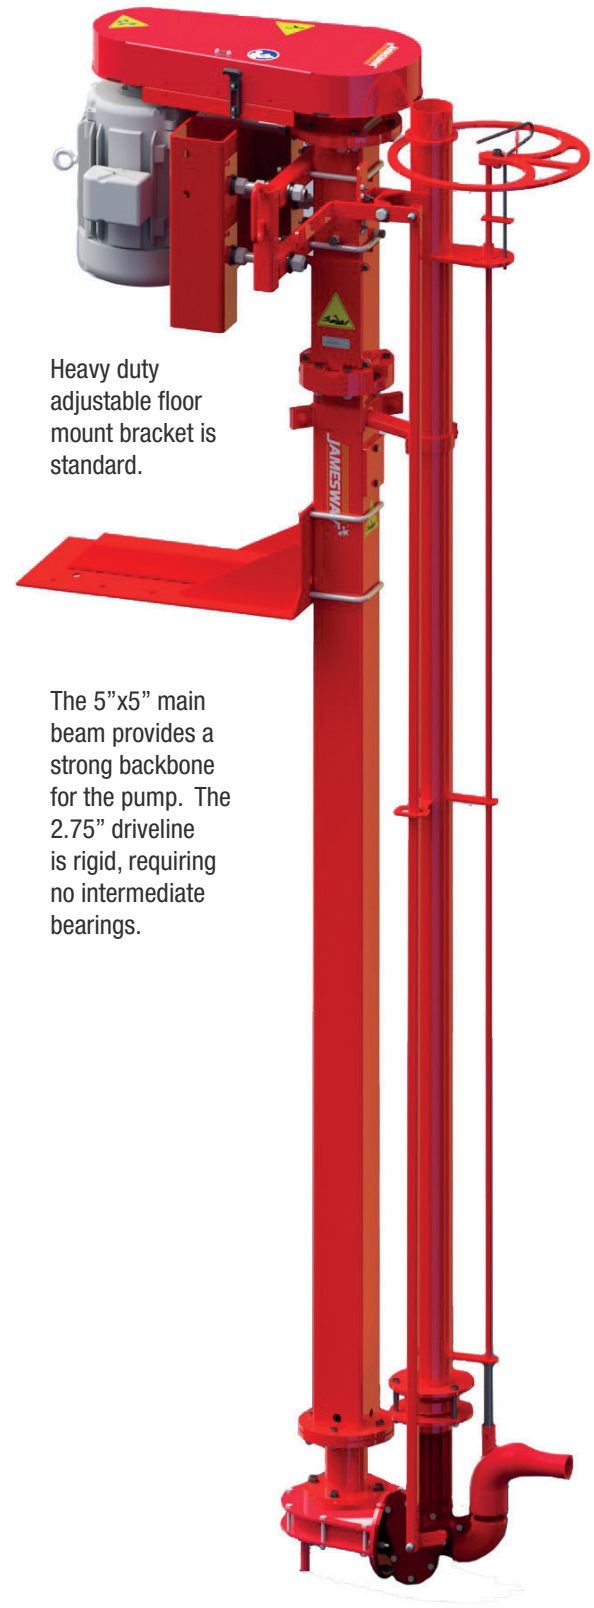

Heavy duty adjustable floor mount bracket is standard.

The 5"x5" main beam provides a strong backbone for the pump. The 2.75" driveline is rigid, requiring no intermediate bearings.

### BELT DRIVE 8" IMPELLER PERFORMANCE

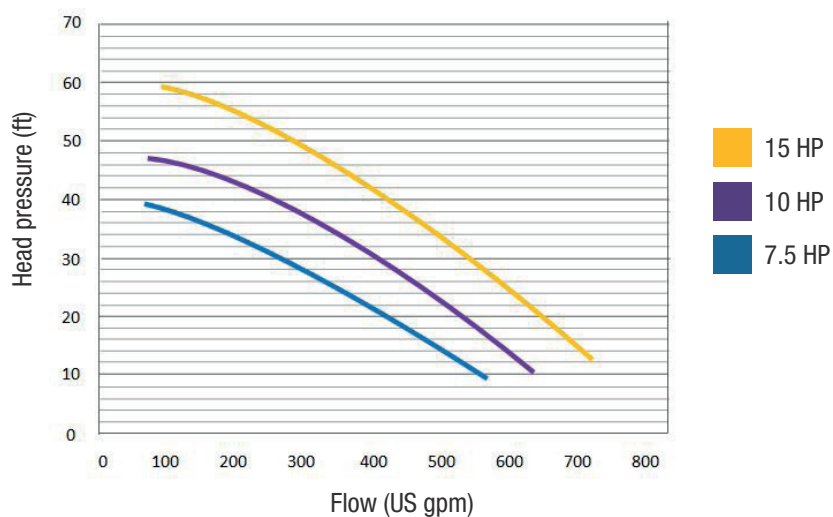




# Whether a simple transfer pump or part of a complex system, use Jamesway accessories and controls for clean, professional looking installations.

Choose simple Modular controls to start and stop your pump on a time schedule, or by float control, or by high/low level controls.



Jamesway RFS Motor Starters are designed to work with Jamesway modular controls. Jamesway VFD controls let you adjust motor speed for precise flow control. ▶

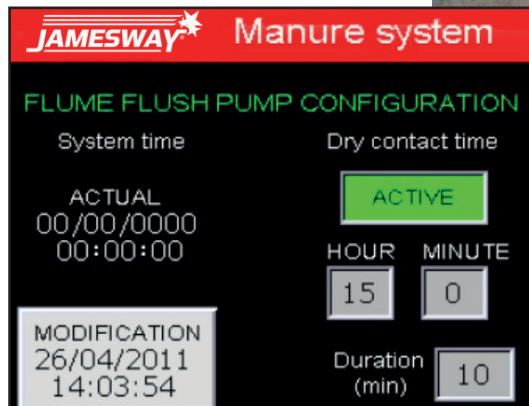

Jamesway Automation controls simplify coordinated operations in the most complicated systems. Controls are customized to your exact requirements, yet all settings are easy to understand and to adjust. ◀

Jamesway offers a vast selection of connection fittings to suit every job.

- Manual, hydraulic or electric valves.
- Top-to-bottom connection kits
- Steel to PVC connections
- 4", 6", 8" quick couplers
- Anti-return valves
- Hose adapters
- Tanker load-out kits ▶



Specifications, descriptions and illustrative material in this literature are as accurate as known at the time of publication, but are subject to change without prior notice. Illustrations may include optional equipment and accessories, and may not include all standard equipment.

DEALER

## JAMESWAY FARM EQUIPMENT, INC.

12 Route 249 St. Francois-Xavier  
(Quebec) JOB 2V0  
Tele: 819-845-7824  
Fax: 819-845-5153

## USA WAREHOUSE

15383 State Hwy.  
131 Tomah, WI 54660

**JAMESWAY**  
*JameswayFarmEq.com*