



HIGH CAPACITY TRANSFER PUMP

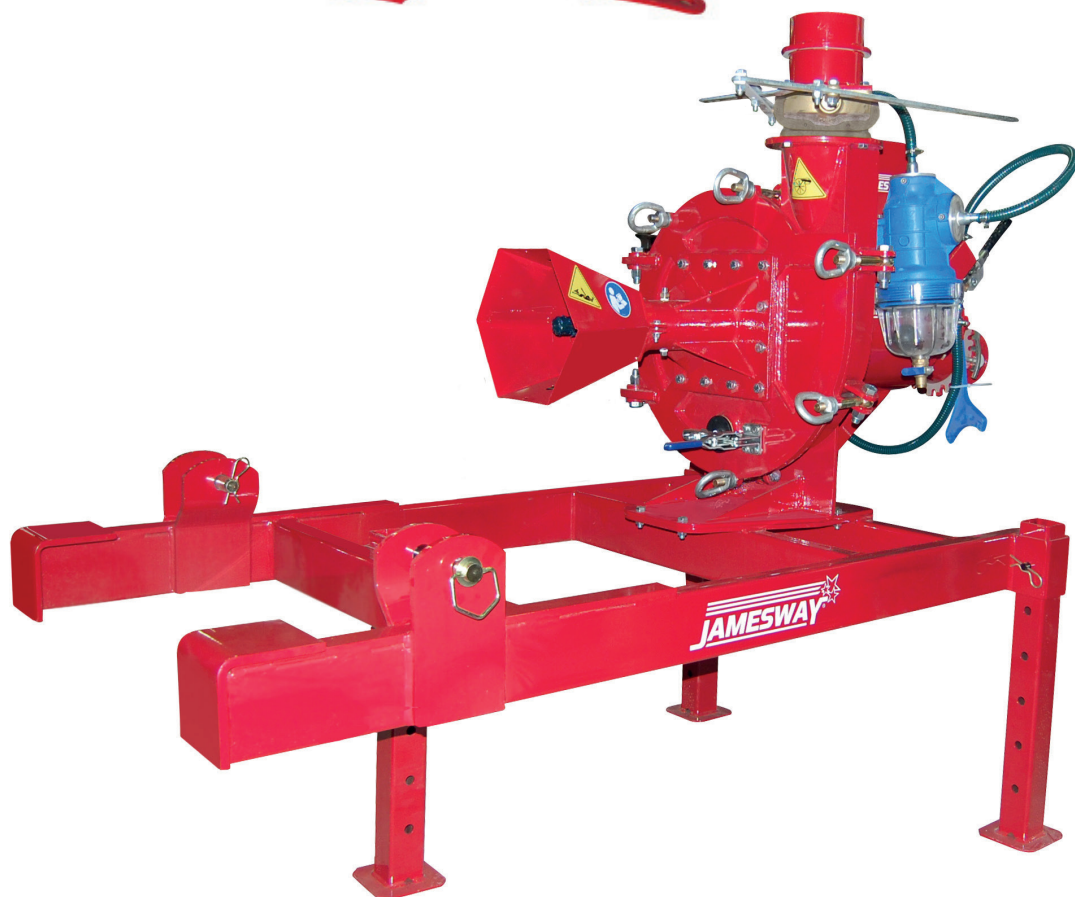

VACU-PUMP

MORE CAPACITY...

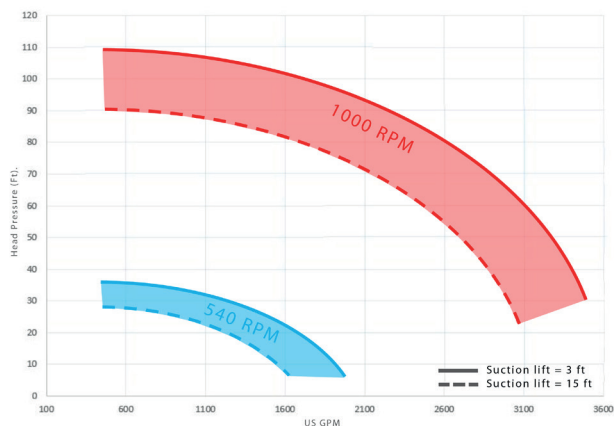

With big volumes of manure to move, nobody has time to waste so the Vacu-Pump features the proven MT-Series impeller, delivering more gallons per minute while using less fuel. The versatile Vacu-Pump operates in three modes:

Maximum Flow – 1000 RPM operation delivers 4,000 US gpm in tanker loading setup.


Maximum distance – 1000 RPM operation delivers up to 90 ft of head pressure.

Lowest Power – 540 RPM operation loads out 2,000 US gpm at only 60 HP

TRAILER OR 2-POINT HITCH MOUNT



Convenient to connect or move around, the trailer model is nicely balanced for easy one-man maneuvering.

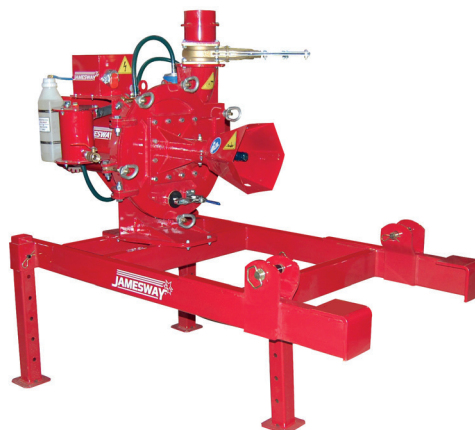

The new 2-PH mount is much easier to attach than 3-Point Hitch models. Eliminating the upper arm also makes PTO installation more accessible.


MORE DURABLE...

The rugged MT-Series impeller features a cast iron 5-seal oilbath bearing chamber to support and protect the drive shaft bearings.



The swing-open door makes clearing out a rock or other debris fast and simple.

A quick-drain port is standard for use in cold weather.

High quality, self-aligning seals and gaskets maintain the liquid prime between loads.

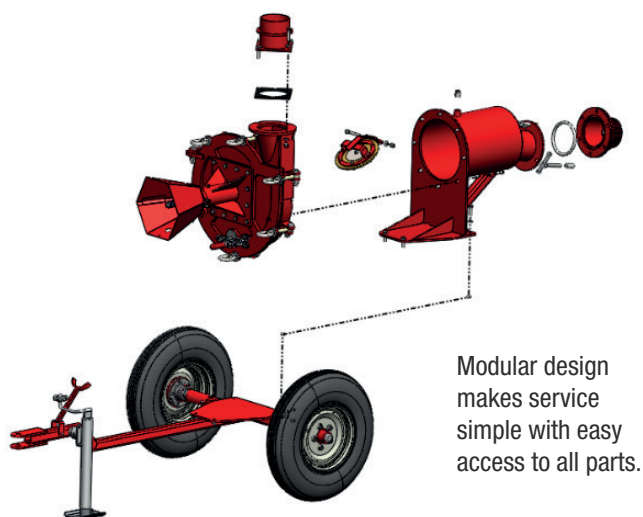

Heavy duty construction and easy swing-open access.

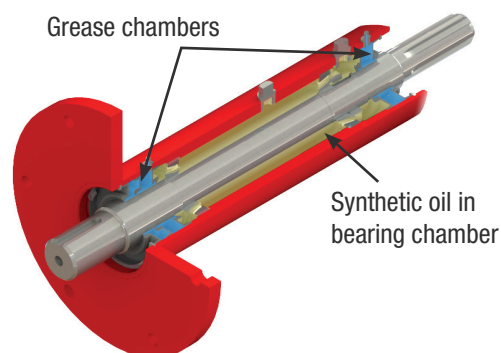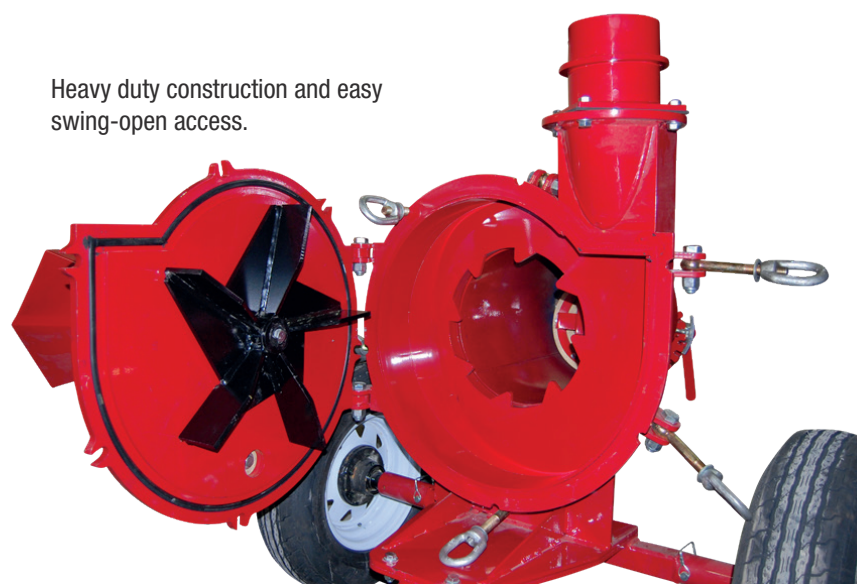


SELF-PRIMING OPTION


The self-priming option gets you pumping sooner. Just push the control handle and the dependable vacuum pump quickly pulls manure up the inlet hose to fill the pump chamber completely. When priming is complete, simply open the outlet gate valve (included with option) and start the tractor PTO.

Includes:

- Vacuum pump
- Oiler system
- Foam trap
- 12V electric motor
- HD power cord with quick connection
- Control handle
- Outlet gate valve

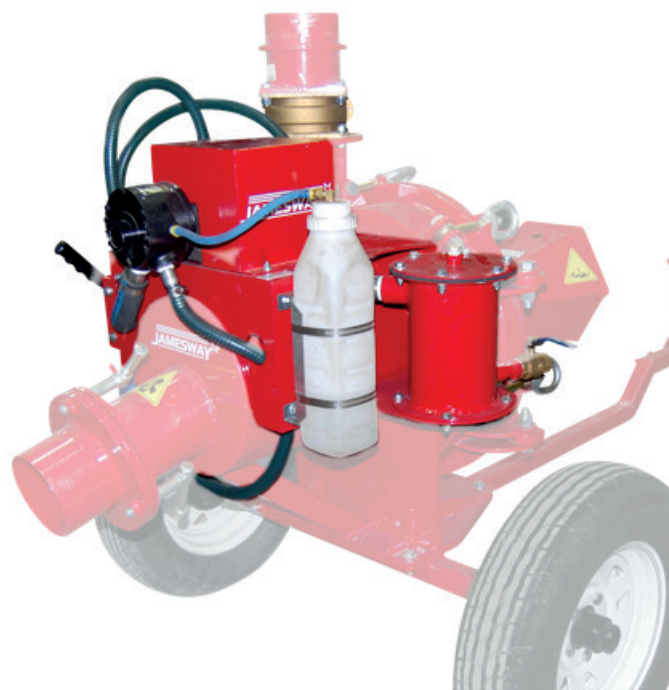


ACCESSORIES

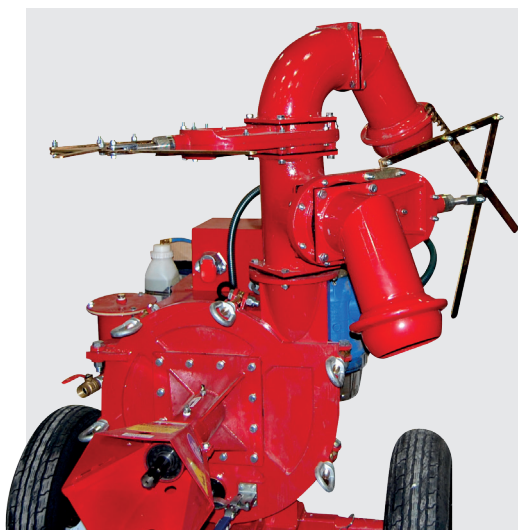



Jamesway offers a wide range of 6" and 8" accessories to complete your Vacu-Pump connections. Outlet accessories can be assembled in endless combinations to fit every need. These heavy duty components are rock solid and powder-coated for long life. The inlet vacuum hose is equipped with a camlock quick connector for easy set up. Choose either the strainer inlet for pits or choose the quick coupler for truck transfer connections.

(Shown with double hose-connection outlets)





BI-POD LOADING PIPE CONNECTORS:

Direct mounted or ball coupler. 6" or 8" outlet.

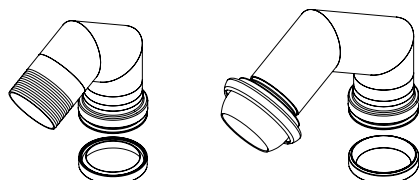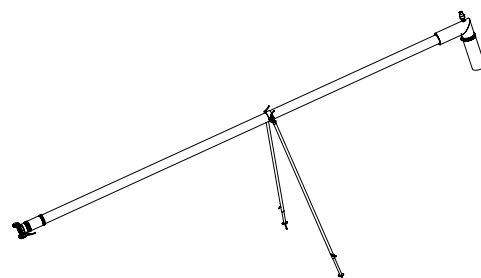


LOAD CART / HOSE CONNECTORS:

Direct mounted or ball coupler. 6" or 8" outlet.

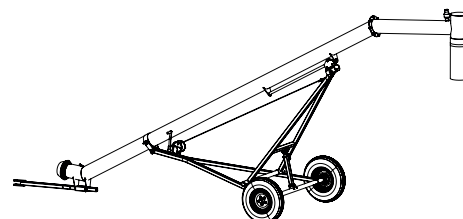

DOUBLE OUTLET CONNECTIONS:

Tee, elbows, gaskets and adapters. 4-bolt mounting flanges on fittings. Manual or hydraulic gate valves.

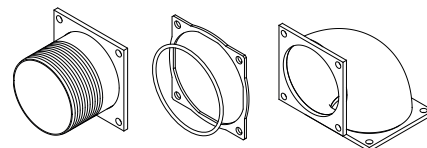

Specifications, descriptions and illustrative material in this literature are as accurate as known at the time of publication, but are subject to change without prior notice. Illustrations may include optional equipment and accessories, and may not include all standard equipment.

DEALER

JAMESWAY FARM EQUIPMENT, INC.

12 Route 249 St. Francois-Xavier
(Quebec) JOB 2V0
Tel: 819-845-7824
Fax: 819-845-5153

USA WAREHOUSE

15383 State Hwy.
131 Tomah, WI 54660



info@jameswayfarmeq.com